


DIN 915 (ISO 4028)

Gewindestift mit Innensechskant und Zapfen

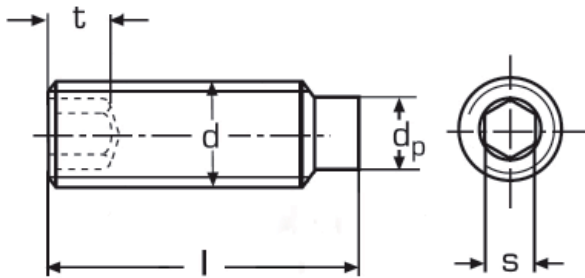

d	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16
d _p max.	1,0	1,5	2,0	2,5	3,5	4,0	5,5	7	8,5	12,0
t min.	0,8	1,2	1,2	1,5	2	2	3	4	4,8	6,4
s	0,9	1,3	1,5	2	2,5	3	4	5	6	8
l										
3										
4										
5										
6										
8										
10										
12										
14										
16										
20										
25										
30										
35										
40										
45										
50										
55										
60										
70										