


# DIN 7500 C-T


## Gewindefurchende Linsenkopfschraube Form C mit Innensechsrund

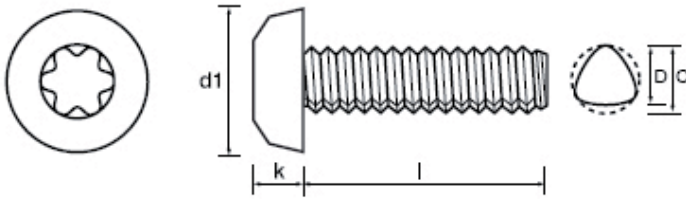

d	M 2	M 2,5	M 3	M 4	M 5	M 6	M 8
d2	4	5	6	8	10	12	16
k	1,72	2,12	2,4	3,1	3,8	4,6	6
ISR	6	8	10	20	25	30	40
l							
4							
5							
6							
8							
10							
12							
16							
20							
25							
30							
35							
40							
45							
50							

# DIN 7500 C-Z

## Gewindefurchende Linsenkopfschraube Form C mit Kreuzschlitz (Pozidrive)

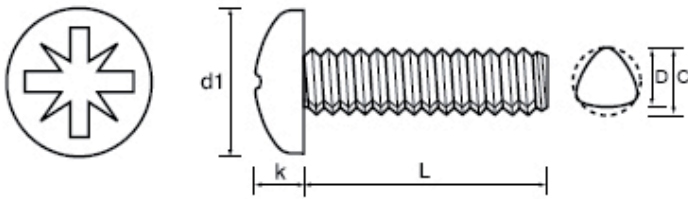

d	M 2	M 2,5	M 3	M 4	M 5	M 6
d2	4	5	6	8	10	12
k	1,72	2,12	2,52	3,25	3,95	4,75
Z-Nr.	1	1	1	2	2	3
l						
4						
5						
6						
8						
10						
12						
16						
20						
25						
30						
35						
40						
45						
50						