


DIN 7500 M-T


Gewindefurchende Senkschraube Form M mit Innensechsrund

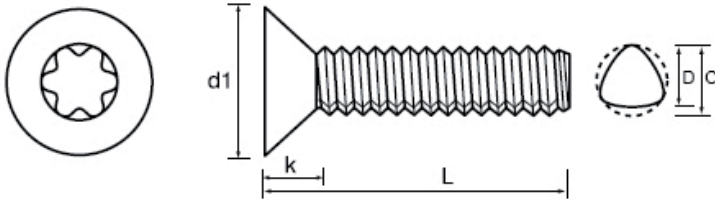

d	M 2,5	M 3	M 4	M 5	M 6
d2	4,7	5,6	7,5	9,2	11
k	1,5	1,65	2,2	2,5	3
ISR	T8	T10	T20	T25	T30
l					
5					
6					
8					
10					
12					
16					
20					
25					
30					
35					
40					
45					
50					

DIN 7500 M-Z

Gewindefurchende Senkschraube Form M mit Kreuzschlitz (PoziDrive)

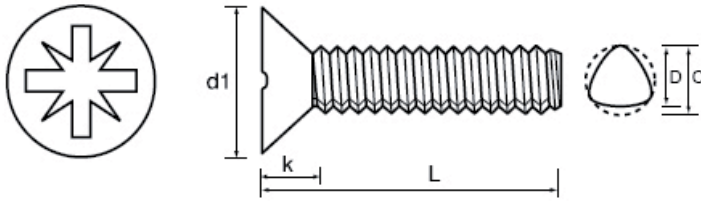

d	M 2,5	M 3	M 4	M 5	M 6
d2	4,7	5,6	7,5	9,2	11
k	1,5	1,65	2,2	2,5	3
Z-Nr.	1	1	2	2	3
1					
5					
6					
8					
10					
12					
16					
20					
25					
30					
35					
40					
45					
50					