


# DIN 603 (ISO 8677)

## Flachrundschraube mit Vierkantansatz

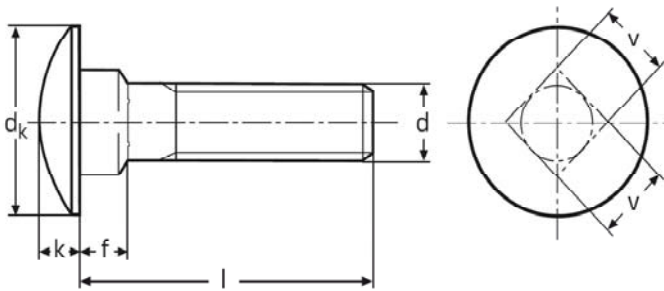

d	M 5	M 6	M 8	M 10	M 12	M 16
dk min.	12,45	15,45	19,35	23,35	29,35	37,2
f min.	2,9	3,4	4,4	5,4	7,25	11,1
k min.	2,7	3,12	4,12	4,62	6,05	8,05
v min.	4,52	5,52	7,42	9,42	11,3	15,3
<b>l</b>						
16						
20						
25						
30						
35						
40						
45						
50						
55						
60						
65						
70						
75						
80						
90						
100						
110						
120						
130						
140						
150						
160						
180						
200						

Zwischenabmessungen und Überlängen auf Anfrage.