


DIN 961 (ISO 8676)

Sechskantschraube mit Gewinde bis Kopf (Feingewinde)

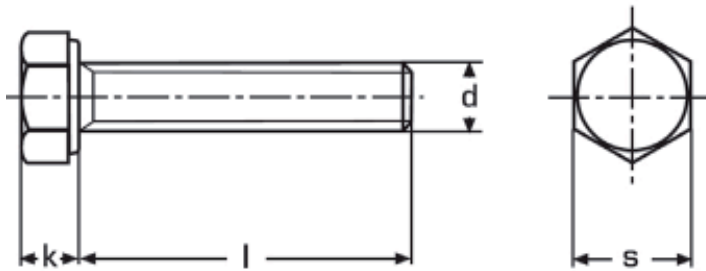

d	M8/1	M10/1	M12/1,5	M16x1,5	M20/1,5	M24/2	M30/2	M36/3
k	5,3	6,4	7,5	10	12,5	15	18,7	22,5
s	13	17(16)	19(18)	24	30	36	46	55
l								
16								
20								
25								
30								
35								
40								
45								
50								
55								
60								
65								
70								
80								
90								
100								
110								
120								
130								
140								
150								
160								
180								
200								

Zwischenabmessungen auf Anfrage.